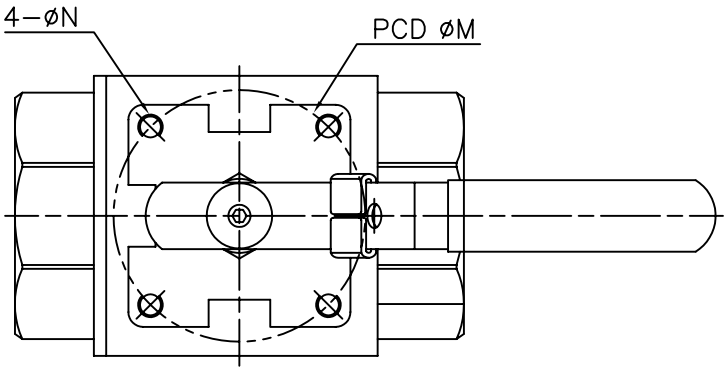

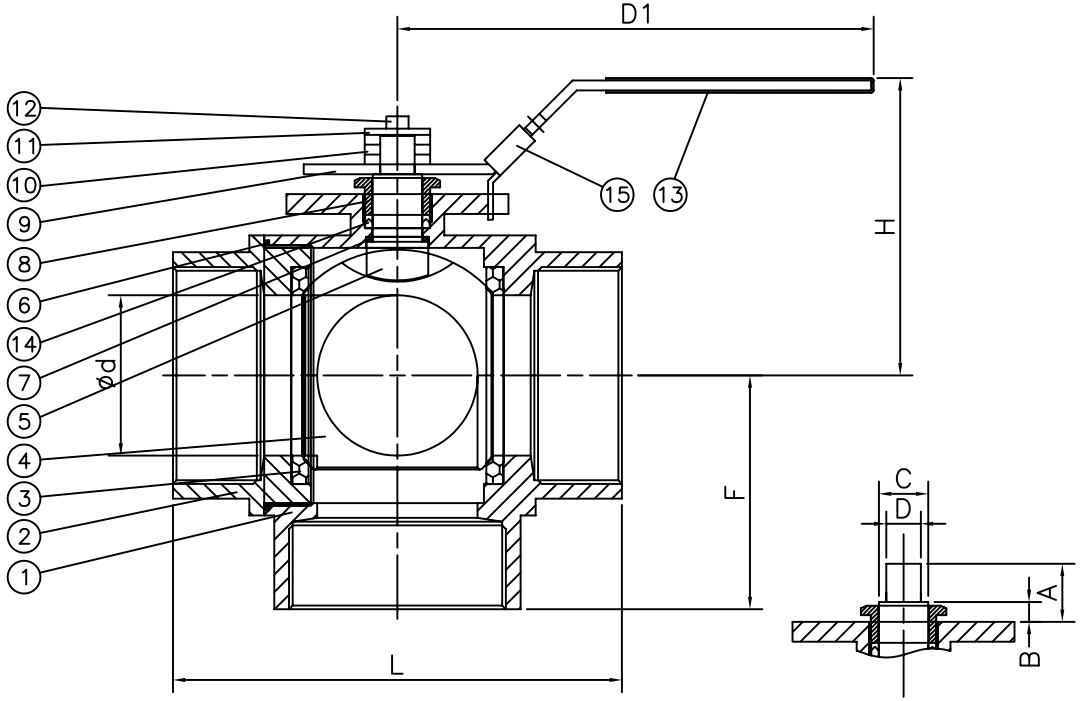

SIZE	d	A	B	C	D	D1	H	F	L	M	N
1/4"	11.0	10.9	5.9	12.0	9.0	133.4	62.7	29.0	57.2	36	M5*0.8
3/8"	11.0	10.9	5.9	12.0	9.0	133.4	62.7	29.0	57.2	36	M5*0.8
1/2"	12.5	10.9	5.9	12.0	9.0	133.4	64.7	34.5	66.0	36	M5*0.8
3/4"	16.0	11.4	6.4	12.0	9.0	133.4	78.7	39.7	85.8	36	M5*0.8
1"	20.0	11.4	6.4	12.0	9.0	133.4	71.2	46.0	88.5	42	M5*0.8
1–1/4"	25.4	23.7	8.2	15.0	11.0	178.5	90.2	51.7	103.4	50	M6*1.0
1–1/2"	31.8	23.7	8.2	15.0	11.0	178.5	93.7	61.0	111.1	50	M6*1.0
2"	38.1	23.7	8.2	15.0	11.0	178.5	98.2	71.4	136.4	50	M6*1.0
3"	65.0	23.5	8.0	20.0	14.0	210.0	119.5	94.7	182	102.0	M8*1.25

NO	DRAW NO	PART	MATERIAL
15	15	LOCKING PLATE	S.S 304
14	14	STEM PACKINGS	PTFE
13	13	HANDLE SLEEVE	VINYL GRIP
12	12	HANDLE NUT	S.S 304
11	11	WASHER	S.S 304
10	10	HANDLE WASHER	S.S 304
9	9	HANDLE	S.S 304
8	8	GLAND	S.S 304
7	7	THRUST WASHR	PTFE
6	6	END SEALS	PTFE
5	5	STEM	S.S 316
4	4	BALL	ASTM A351 GR.CF8M
3	3	SEAT	PTFE
2	2	CAP	ASTM A351 GR.CF8M
1	1	BODY	ASTM A351 GR.CF8M

PORT / TYPE	1	2	3	4
L				
T				

REV	DATE	DESCRIPTION	CODE	REVISER	REMARKS
		3–Way Diverter Ball Valve, 1000WOG, Bottom Entry			

MATERIAL	APPROVE		CHECK		REV F
	SCALE	FREE	UNIT	mm	DRAWN BY Peggy
	PART NO	S2T			DATE 2004.06.29
OTHER	DWG NO	S2T-3E	TITLE		Q'TY
					3-WAY DIVERTER BALL VALVE

Anson Flow Corp.