


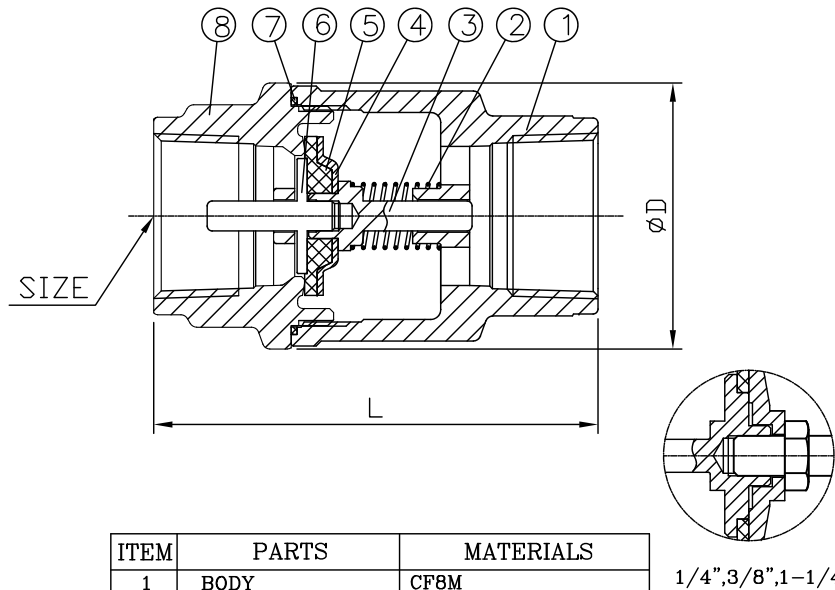

ITEM	PARTS	MATERIALS
1	BODY	CF8M
2	SPRING	SS 316
3	SLIDE PIN	SS 316
4	SEAT HOLD	CF8M
5	SEAT	PTFE/(3"Only)TFM4215
6	SLIDE PIN	CF8M/SS 316
7	GASKET	PTFE/(3"Only)TFM
8	END CAP	CF8M

Specification

- * Available in stainless steel
- * Body & end are investment cast
- * 100% air tested under water at 80 psi
- * Pressure Test & Inspection : API 598
- * Pressure Ranges: 1/4" - 2" (800psi)
2 1/2" - 3" (600psi)

SIZE	D	L
1/4~3/8"	30.9	57 (2.24")
1/2"	34.2	58.2 (2.29")
3/4"	45.5	73.2 (2.88")
1"	53.2	89 (3.50")
1-1/4"	62.5	106.2 (4.18")
1-1/2"	75.5	125 (4.92")
2"	96	152.3 (6.99")
2-1/2"	118.3	177.8 (7")
3"	134	206.5 (8.13")

					REV	
					DRAWN BY	Lawrence
					DATE	2025.04.29
					Q'TY	1
					TITLE	2-PC Threaded End Spring Check Valve
REV	DATE	DESCRIPTION	CODE	REVISER	 Anson Flow Corp.	